

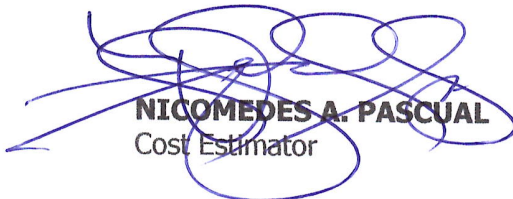


Scope of Works

Project Title: PROPOSED RE UPGRADING OF NJMPTI GRANDSTAND WITH DRAINAGE SYSTEM

1. Mobilization / Installation of Temporary Facilities and Bank House.
2. Procurements and Delivery of materials.
3. Staking and Excavation.
4. Fabrication and Installation of Column Footing bars and Column.
5. Fabrication and Installation of Forms and Scaffoldings.
6. Concreting of Column Footing and Column
7. Installation of Interior and Exterior CHB Walls
8. Fabrication and Installation of bars for beam.
9. Installation of electrical rough-in materials and plumbing rough-in.
10. Filling of earth fill material and tampering.
11. Plastering of CHB walls.
12. Concreting of beams and floor slabs.
13. Fabrication and installation of steel trusses.
14. Installation of C-purlins and GI roofing.
15. Installation of ceiling joist and ceiling board including heat insulation.
16. Installation of electrical fixtures and plumbing fixtures.
17. Painting works
18. Installation of doors and windows.
19. Installation of Phenolic board partition.
20. Installation of Floor, Wall Tiles and Rubber Tile Nosing.
21. Installation of Wall Tiles 0.3x1.0m, Stainless Railing and Logos.
22. Concreting of Drainage, Steel Grating and Concrete Steps.
23. Leveling and laying of Crushed Gravel and Sand in Formation Area.
24. Tapping of Electrical and Plumbing Lines and final testing.
25. Installation of Septic Tank
26. Demobilization / Clearing / Cleaning.

Prepared by:


NICOMEDES A. PASCUAL
Cost Estimator

Submitted by:


ENGR. ROMY V. YALO
Acting Chief, GSS, AD